

MICRO QUAD

Apparecchio da incasso a terra e a parete per esterni ed interni costituito da:

- Corpo in alluminio pressofuso verniciato
- Anello frontale in acciaio inox AISI 316 - Art. 5074
- Anello frontale in ottone cromato Art. 5075
- Diffusore in vetro satinato temperato
- Guarnizione in silicone
- Viti di chiusura in acciaio inox
- Controcassa in tecnopolimero
- Verniciatura in polveri poliesteri ad elevata resistenza ai raggi ultravioletti e alla corrosione

Outdoor and indoor recessed ground and wall luminaire constructed of:

- Painted die-cast aluminium body
- Stainless steel AISI 316 ring Art. 5074
- Cromed brass ring - Art. 5075
- Satin tempered glass diffuser
- Silicon gasket
- Stainless steel screws
- Technopolymer holder
- Painting using high resistance to UV and corrosion polyester powders



IP67 Art. 5074

IP65 Art. 5075

Colori LED - LED Colours

Bianco White Art. 5074 - 5075

Rosso Red Art. 5074

Diffusore - Diffuser

Codice-Code **00 5074**
00 5075


Le lampadine vengono fornite solo su richiesta
Bulbs supplied only on request

Gli apparecchi vengono forniti completi di cassaforma
The holder is enclosed to the luminaire

Classe energetica : vedi pag. 370
Energy class : see page 370




Incasso a terra - Art. 5074
Recessed ground version



Incasso a parete - Art. 5075
Recessed wall version




Incasso a soffitto - Art. 5075
Recessed ceiling version




Entrata singola cavi di alimentazione con pressacavi PG 7 (Ø 3,5÷7 mm). Usare cavi flessibili. (Cavi rigidi possono compromettere la tenuta stagna IP67).


Single power supply entry cable with PG 7 (Ø 3,5÷7 mm) cable glands. Use flexible cables (rigid cables may compromise IP 67 rating)




5074.530
L'apparecchio necessita di trasformatore remoto 230V/12V posizionato all'inizio della linea di alimentazione.
The transformer (230V-12V) for low voltage must be installed in the remote position



LED
L'apparecchio necessita di alimentatore remoto elettronico 12-24V dc.
The luminaire needs a remote power supplier 12-24V dc.




LED connessione in parallelo.
LED parallel connection.



La cassaforma deve essere installata a filo terreno, prevedendo ghiaia di drenaggio per almeno 30 cm.
Ground luminaire. The holder must be recessed into the ground providing a drainage-gravel for at least 30 cm



CS 44 - Art. 5074
Cassaforma in tecnopolimero per vano ad incasso h 94 mm- 114 x 85 mm - \square 64 mm
Technopolymer holder to be recessed h 94 mm - 114 x 85 mm - \square 64 mm



Carico massimo:
Kg 2000 a velocità max 30 Km/h
Maximum load:
Kg 2000 at 30/Km/h max speed



Simbolo che indica la temperatura superficiale sul vetro T<70°C (dati rilevati a ta di 15°C)
Glass surface temperature T<70°C (ambient temperature data of 15°C)

Temperatura calotta (ta 15°C) Cover's temperature (ta 15°C)		Zona di installazione: Intended usage:
LED	<40°C	5
QR-CBC 35 10W	60°C	3/4


NOTA: zona di installazione definita dalla norma EN 60598-2-13 Allegato A - Vedi pag. 369
Note: intended usage is defined by the standard EN 60598-2-13 Annex A - See pag. 369





5074

Apparecchio da incasso a terra

Ground recessed luminaire

- **5074.010** LED max 1,1W 12-24V dc 100 lm 6300 K
- **5074.030** LED rosso/red max 1,1W 12-24V dc 50 lm
- **5074.530**  QR-CBC35 10W GU4 12V
- Con trasformatore remoto (non fornito) / Remote transformer (not supplied)

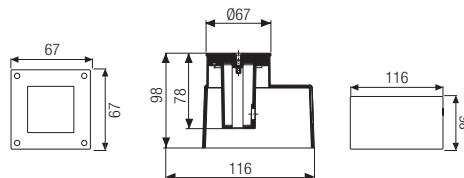

5074 01





5075

Apparecchio da incasso a parete o a soffitto

Recessed wall or ceiling luminaire

- **5075.660** LED 2W 36 lm 4000 K

Con trasformatore remoto (non fornito) / Remote transformer (not supplied)



5075 66

Trasformatore elettronico per Micro Geo LED - Solo su richiesta

Suggested electronic transformer for Micro Geo LED - Only on request

Articolo Article	Quantità apparecchi collegabili in parallelo Max no of appliances connected in parallel		Watt	Volt
	ART. 5074	ART. 5075		
A 4	4 LED	3 LED	8 W	24 V
A 9	9 LED	6 LED	15 W	24 V
A 12	12 LED	8 LED	19 W	24 V
A 24	24 LED	12 LED	30 W	24 V